

## Equipment spec

Model: SL26E Electric Scissor Lift

Category: 8m / 26ft platform height, narrow width

Working height: 8.10m


Max height: 6.10m

Width: 0.82m

Lifting capacity: 408kg

Weight: 1,594kg

Power: Battery

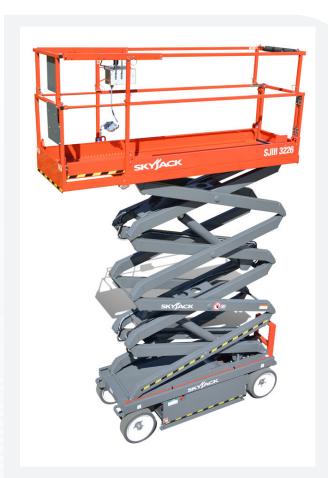

## **Standard features**

- Drivable at full height with roll out deck fully extended
- Variable speed, rear two wheel hydraulic drive
- Dual holding brakes
- Proportional controls for drive & lift functions
- 0.91 m roll out extension deck
- 24V DC power source
- Low voltage battery protection
- Relay based control system
- Colour coded and numbered wiring system
- 30% gradeability
- Solid rubber, non-marking tyres
- Pothole protection system
- Wiring for AC outlet on platform
- Tilt alarm with drive & lift cut-out
- Overload sensing system
- Lowering warning system
- Operator horn
- Half height spring hinged gate
- Hinged railing system
- Lanyard attachment points
- Forklift pockets and tie down/lift lugs

Model:

## **SL26E Electric Scissor Lift**

Category:

8m, 26ft platform height

Dimensions			
А	Work Height	8.10 m	
В	Raised Platform Height	6.10 m	
C	Lowered Platform Height	0.97 m	
_ D	Overall Width	0.82 m	
E	Overall Length	2.32 m	
F	Stowed Height (Rails Up)	1.97 m	
G	Stowed Height (Rails Down)	1.73 m	
Н	Platform Width (Inside Dimension)	0.71 m	
I	Platform Length (Inside Dimension)	2.13 m	

Specifications	
Extension Deck	0.91 m
Ground Clearance	8.89 cm
Wheelbase	1.90 cm
Weight	1.75 m
Gradeability	1,594 kg
Turning Radius (Inside)	30%
Turning Radius (Outside)	1.27 m
Lift Time (With Rated Load)	2.74 m
Lower time (With Rated Load)	33 sec
Drive Speed (Stowed)	29 sec
Drive Speed (Raised)	3.2 km/h
Maximum Drive Height	1.1 km/h
Capacity (Overall)	Full Height
Distributed Capacity (Main Platform)	408 kg
Distributed Capacity (Extension Deck)	272 kg
Local Floor Load (With Rated Load)	136 kg
Overall Floor Load (With Rated Load)	897 kPa
Overall Floor Load (With Rated Load)	12 kPa



## **Special features**

- Operator horn
- Half height spring hinged gate
- Hinged railing system
- Lanyard attachment points
- Forklift pockets and tie down/lift lugs

